



Manure spreader

CS spreader



# Compact and flexible – The CS spreader



Foldable side panels  
for flexible loading

Robust protection strips  
prevent damage  
to the side panels

4-beater spreading unit  
ensures a homogeneous spreading  
pattern over an operating width of  
up to 8 m

## CS spreader models

The CS spreader is the successor model of the BE spreader which has proven itself over decades. The compact CS spreader is particularly suitable for businesses with own machinery and ensures effective discharge of manure. The folding side panels enable a double use as a transport trailer.

- CS 75-95
- Loading capacity of 7.5 - 9.5 m<sup>3</sup>
- The folding side panels enable a double use as a transport trailer
- Easy operation

## Contents

Spreading unit and transport floor	4-5
Superstructure and chassis	6
Operation and technical data	7

# Robust design for strong performance

- Spreading unit and transport floor

- + Fine distribution
- + Perfect spreading pattern
- + High throughput rate
- + Ideal for spreading on grassland




### 4-beater spreading unit

- Four vertical spreading beaters for operating widths between 6 - 8 m
- Fan-shaped spreading tines ensure even crushing of the spreading material



### Spreading unit gearbox

- Easy maintenance for a high degree of reliability
- Inspection windows at each spreading unit gearbox enable a fast visual check of oil levels

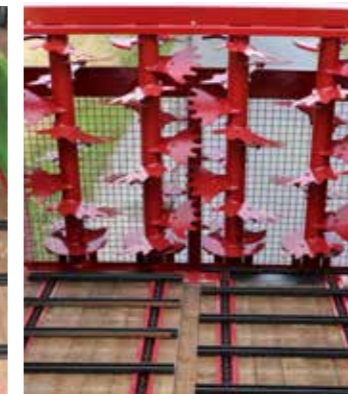

### Transport floor

- Reliable feed by one (CS 75) or two (CS 95) transport floor lines
- 10 mm thick round steel chains with a breaking load of 13 t each
- Screwed transport floor strips enable easy exchange in case of damage
- 25 mm thick wooden floor

### Transport floor drive

- High-torque feed gearing with hydraulic drive
- Adjustment of transport floor speed by means of control valve on the drawbar
- Continuously variable adjustment enables easy and exact adaptation of discharge quantity



## Intelligent design for more comfort – Superstructure and chassis



### Side panel and extensions

- 400 mm high extension panels optionally available to increase the loading capacity
- Extension panels can be folded down to reduce the loading height
- Easy loading even with farm loaders or smaller tractors
- Side panels can be completely folded down
- Flexible double use as a transport trailer



### Chassis

#### Standard equipment

- Single axle with various tyre options
- Large tyres for little rolling resistance and protection of sward

#### Optional equipment on CS 95

- Spring-mounted tandem chassis for maximum driving comfort
- Optimum driving behaviour even during road travel

### Grouping of lubrication points

- Optional lubricating strip for upper spreading beater bearings
- Easy and convenient maintenance



## Everything under control – Operation



### Direct connection to tractor

- Operation of hydraulic functions via direct tractor connection
- Setting of transport floor speed via flow regulation valve

## Technical data

	CS 75 with 520/50 R 17 tyres	CS 95 with 520/50 R 17 tyres
<b>Dimensions</b>		
Length [m]	6.16	6.96
Height [m]	2.84	2.88
Outside wheel width [m]	2.17	2.17
Loading height [m]	1.75	1.79
<b>Dead weight</b>		
Dead weight from [kg]	2,000	2,300
<b>Gross vehicle weight rating</b>		
Gross vehicle weight rating [kg]	5,700	8,000
<b>Power requirement</b>		
Power requirement from	25 kW / 35 HP	36 kW / 50 HP
<b>Inside dimensions of superstructure</b>		
Length [m]	3.70	4.60
Width [m]	1.80	1.80
Side panel height [m]	0.50	0.50
<b>Loading capacity</b>		
Loading capacity [m³]	7.5	9.5
<b>Spreading unit</b>		
Spreading unit clearance [m]	1.15	1.15



[www.strautmann.com](http://www.strautmann.com)

B. Strautmann & Söhne GmbH u. Co. KG



Bielefelder Straße 53  
D-49196 Bad Laer  
Phone: +49(0)5424/802-0  
Fax: +49(0)5424/802-76  
[info@strautmann.com](mailto:info@strautmann.com)  
[www.strautmann.com](http://www.strautmann.com)